

Separation of cationic biocide by means of ultrafiltration process

Aleksandra Klimonda^{1,*}, and Izabela Kowalska¹

¹Wrocław University of Science and Technology, Faculty of Environmental Engineering, Wybrzeże S. Wyspiańskiego 27, 50-370 Wrocław

Abstract. The usefulness of ultrafiltration process for removal of quaternary ammonium compound has been assessed. Intersep Nadir membranes with a cut-off of 5 kDa made of cellulose and polyethersulfone were tested. The concentration of cationic surfactant in the feed solutions amounted to 50–3500 mg/L. It was found that polymer type affects the removal efficiency of cationic biocide. The polyethersulfone membranes allowed to remove above 63% of BAC from the feed solution of concentration equal to 100 mg/L, while for cellulose membranes the highest retention (i.e. 27%) was obtained for process with 3500 mg/L. During the tests surfactant affected on membranes' hydraulic properties. For experiments with polyethersulfone membranes, the relative flux obtained was in the range 80-20% (depending on pollutant concentration) of distilled water flux. Cellulose membranes were less fouling susceptible. Moreover, in experiment with surfactant concentration equal to 1000 mg/L an increase in membrane permeability (comparing to distilled water flux) was pronounced.

1 Introduction

Nomenclature:

A – membrane area, m²

BAC – benzalkonium chloride

C_f – concentration of the surfactant in the feed, mg/L

CIP – cleaning in place

CMC – critical micelle concentration

C_p – concentration of the surfactant in the permeate, mg/L

J – permeate flux, L/m² h

J_0 – distilled water flux, L/m² h

$MWCO$ – molecular weight cut-off, kDa

R – retention coefficient, %

RF – relative flux, %

t – time, h

V – volume of the permeate, L

QAC – quaternary ammonium compound

* Corresponding author: aleksandra.klimoda@pwr.edu.pl

In the 21st century more and more often the problem of clean water availability can be observed. One of the largest water receiver is an industry, thus reduction of water consumption in industrial departments is required. For this purpose, application of effective treatment techniques enable recycling of process streams what may limit water loss. Membrane separation processes allow to meet the following goals: separation, concentration and fractionation of solution compounds. Hence, membrane-based technologies are being often implemented for industrial wastewater treatment [1] and/or water/valuable compounds recovery.

In recent decades, there has been a dynamic development of the surfactants market due to their numerous utility properties (wetting, foaming, emulsifying and dispersing).

Important feature of the surfactants is the fact that these compounds may exist both in monomer and aggregate form in water solutions, depending on the concentration. Exceeding concentration named critical micelle concentration (CMC) result in forming aggregates (micelles). Fig. 1 presents schematic diagram of surfactant monomer and micelle. The diameter of the micelle is about twice as large than the monomer's length.

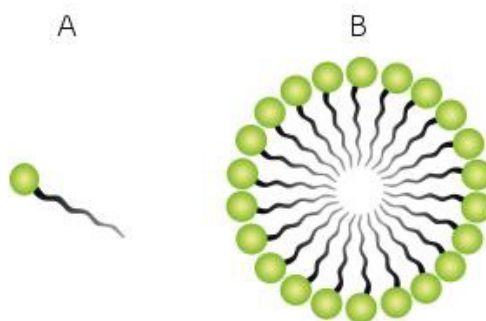


Fig. 1. Surfactant monomer (A) vs micelle (B).

Micelles are characterized by significantly greater molecular weight than monomers (Table 1), thus various membrane techniques may be employed in order to purification monomeric or micellar solution – treatment of high concentrated solutions (above CMC) may be realized with membranes of low molecular weight cut-off.

Table 1. Comparison of molecular weights of monomers and micelles of selected surfactants.

Surfactant	Molecular weight of monomer (Da)	Molecular weight of micelle (Da)
SDBS (sodium dodecylbenzenesulfonate)	348.48	17,748 [2]
CTAB (cetyltrimethylammonium bromide)	364.45	22,231 [3]
SDS (sodium dodecyl sulphate)	288.37	17,879 [4]

Laundry detergents, household, and personal care products [5], as well as cleaning solutions applied in CIP systems [6, 7] are the main fields of surfactants application. The commonly used cationic surfactants are quaternary ammonium compounds (QACs) which are being employed as antiseptic [8] and softening agents [9]. The mechanism of antiseptic action of QACs is associated with their effect on the cytoplasmic membrane of cells [8, 10]. QACs bind to inner membranes and disorganise them via their long alkyl chain [10] which leads to cell lysis. Literature data report that the concentration of QACs in sewage and surface water is in the range of ng/L to µg/L, while the content of QACs in sludge and

sediments is in the range of $\mu\text{g}/\text{kg}$ to mg/kg [11]. High abundance of these compounds in sediments and sludge results from strong sorption and resistance to biodegradation under anoxic/anaerobic conditions [11].

Due to the biocidal properties of QACs, it is necessary to remove them from industrial wastewater before discharge into the sewage system. High-concentrated industrial effluents are particularly dangerous, what requires the implementation of effective separation methods.

2 Materials and methods

2.1 Membranes

In the tests, commercially available Intersep Nadir asymmetric membranes made of polyethersulfone (UP005) and cellulose (UC005) were used. The properties of the ultrafiltration membranes are shown in Table 2.

Table 2. Characteristic of the UF membranes.


Membrane type	Membrane polymer	Polymer hydrophilicity	MWCO (kDa)	Pure water flux ($\text{L m}^{-2} \text{h}^{-1}$)*
UC005	cellulose	definitely hydrophilic	5	43
UP005	polyetherosulfone	hydrophilic	5	37

* Determined by authors. TMP = 0.25 MPa, 25°C.

The experimental research was carried out on laboratory scale ultrafiltration system equipped with an Amicon 8400 cell. The effective surface area of the membrane amounted to $4.54 \times 10^{-3} \text{ m}^2$ and the volume was 0.350 L. The dead-end filtration tests were performed under the pressure of 0.25 MPa.

2.2 Solutions

Benzalkonium chloride (BAC) is a widely employed cationic surfactant which is a mixture of alkylbenzyltrimethylammonium chlorides having different length alkyl chain. The structural formula of BAC is presented in Fig. 2.



$$n = 8, 10, 12, 14, 16, 18$$

Fig. 2. Benzalkonium chloride structural formula.

Model solutions of cationic BAC (product purity 80%) were tested. BAC concentration in solutions was equal to 50, 100, 500, 1000 and 3500 mg/L. Surfactant critical micelle concentration was determined via conductivity measurements (Elmetron CC-411) at temperature of 25°C.

Spectrophotometric measurements (at wavelength of 215 nm) were carried out in order to evaluate BAC concentration in the tested solutions. The effectiveness of the membranes was assessed based on surfactant retention coefficient and permeate relative flux (Table 3).

Table 3. Parameters for membrane process efficiency evaluation.

Parameter	Equation	Unit
Relative flux	$RF = \frac{J}{J_0} \cdot 100$	%
Permeate flux	$J = \frac{V}{tA}$	$Lm^{-2}h^{-1}$
Retention coefficient	$R = \frac{C_f - C_p}{C_f} \cdot 100$	%

3 Results and discussion

3.1. CMC value

The dependence of solution conductivity as a function of BAC concentration is shown in Fig. 3. The calculated CMC value amounted to 1320 mg/L. The literature data correspond to obtained result. Authors [12–15] reported CMC of benzalkonium chloride equal to 5 and 5.2 mM (1695 and 1794 mg/L). Taking into account the fact that the product purity was 80%, the CMC values are convergent.

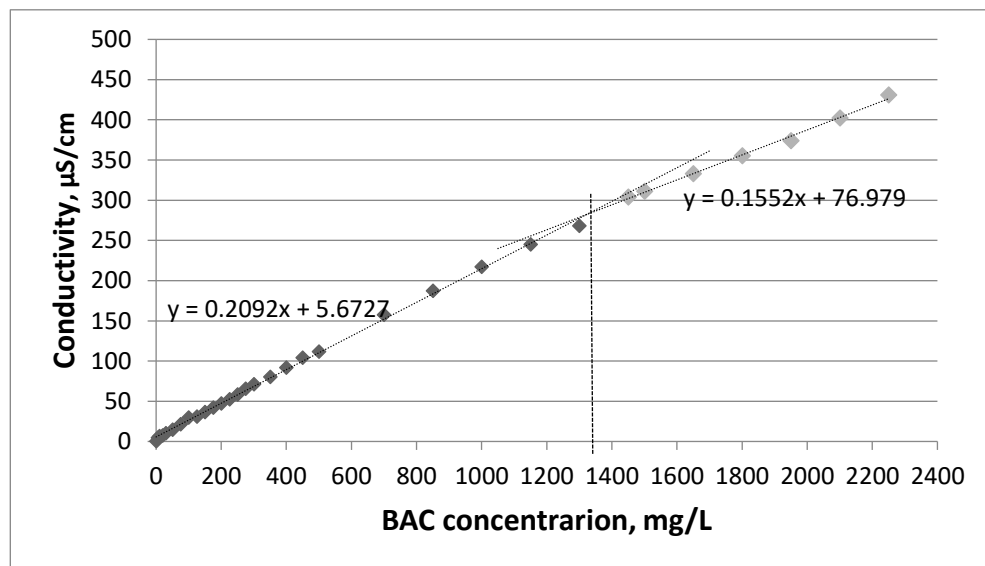


Fig. 3. Conductivity versus benzalkonium chloride concentration.

3.2. Transport and separation properties

Retention coefficient obtained for 25% permeate recovery ratio is presented in Fig. 4. As can be seen, polyethersulfone membranes rejected 58, 50, 43, 30 and 38 % of cationic surfactant in experiments with solutions containing 50, 100, 500, 1000 and 3500 mg/L, respectively; while for cellulose ones, retention coefficient was in the range from 0 to 26.5%. Thus, membrane material seems to be a crucial parameter affecting the efficiency of BAC separation. Due to the lower hydrophilicity polyethersulfone membranes were more susceptible to surfactant adsorption, and consequently rejected significantly more of the contaminant than the strongly hydrophilic cellulose membranes. The retention coefficient of BAC obtained in the tests confirm the literature data. Iqbal et al. [14] in experimental research concerning arsenic removal with the use of ultrafiltration membranes (MWCO 3 kDa, regenerated cellulose) and cationic surfactants, reported BAC rejection in the range from 10 to 25% when the concentration of BAC in the feed was equal to 1 CMC. Increasing the surfactant concentration to the value of 2 CMC resulted in rejection coefficient in the range from 40 to 45%.

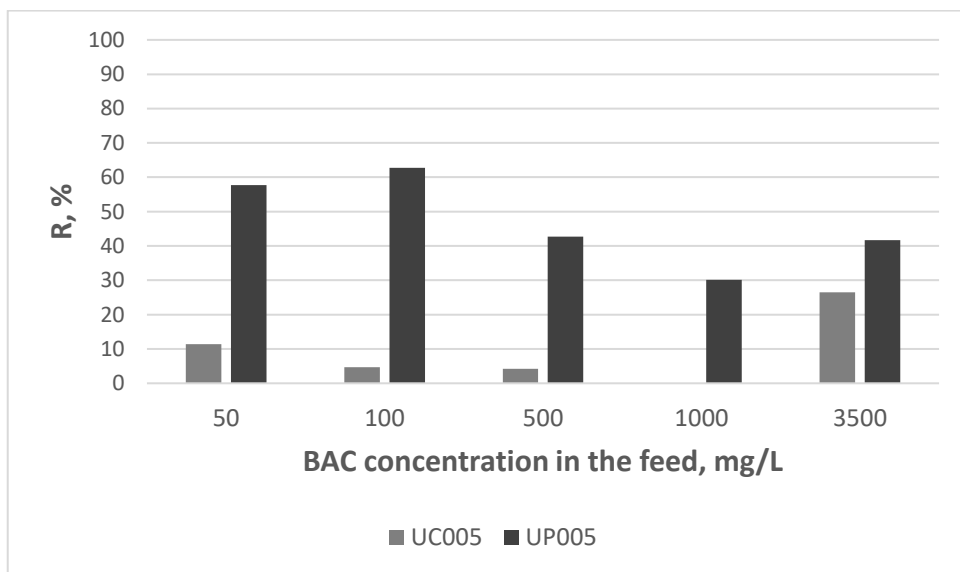


Fig. 4. Benzalkonium chloride retention coefficient obtained for 25% of permeate recovery (TMP = 0.25 MPa).

Surfactant concentration in the permeate obtained during the tests with UC005 membrane and the highest BAC content in the feed (3500 mg/L) reached up to 2590 mg/L. Contaminant penetration through the membrane, pronounced even for micellar solutions, could be explained by the transfer of elongated micelles or by creeping of the adsorbed surfactant molecules onto the membrane pore surface [16]. Another reason of high concentration in the permeate side may be the fact, that BAC exists in the form of homologs differ in alkyl chain length and the lower molecular weight particles might pass through the membrane.

Fig. 5. presents relative flux obtained during the experiments. The effect of surfactant concentration in the feed on membrane permeability was appeared. According to previous study [17], the polyethersulfone membranes were more susceptible to fouling than

cellulose ones, and consequently the drop in UP005 membrane permeability was more pronounced, i.e. from 80% to 20% for surfactant concentration in the feed solutions equal to 50 and 3500 mg/L, respectively. During the experiments with the UC005 membrane opposite relationships were observed. At the lowest BAC concentration, the surfactant fouling was the most significant – membranes exhibited 70% of its distilled water flux. Filtration of solutions of higher concentration of the compound (500 mg/L) resulted in RF equal to 100%; further increase in BAC concentration led to exceeding the value of 100%. The correlation between BAC separation and permeability drop may be attributed to mechanism of monomer adsorption within the membrane pores which result in increasing membrane resistance and further – in flux decrease.

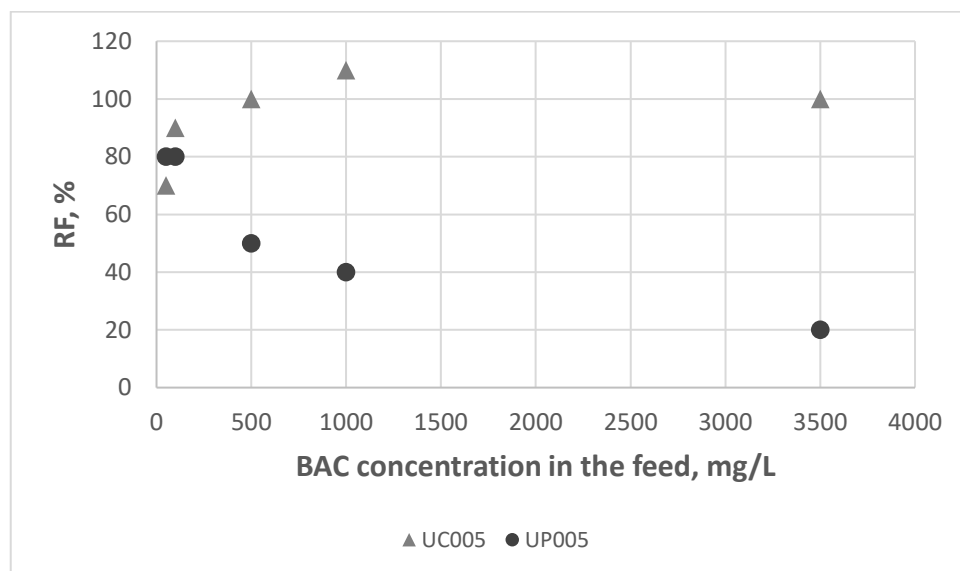


Fig. 5. Benzalkonium chloride retention coefficient and relative flux obtained for 25% of permeate recovery ($TMP = 0.25$ MPa).

4 Conclusions

It was shown that the removal efficiency of benzalkonium chloride in UF process is strongly dependent on the membrane material. Polyethersulfone proved to be more suitable polymer for this purpose – the retention coefficient was in the range from 30 to 65%. It was shown that ultrafiltration may be employed as a first stage of purification, before the next treatment processes with the use of membranes with lower molecular weight cut-off].

This work was supported by a grant (No. 0401/0002/17) from the Department of Environmental Engineering, Wrocław University of Science and Technology.

References

1. A. Caetano, M.N. de Pinho, E. Drioli, H. Muntau, *Membrane Technology: Applications to Industrial Wastewater Treatment* (Kluwer Academic Publisher, 1995)

2. J.H. Huang, Y. Zhao, G.M. Zeng, L. Peng, X. Li, L.X. Liu, F. Li, L.X. Shi, F. Yuan, *Water Sci. Technol.* **72**, 623 (2015)
3. https://www.sigmaaldrich.com/content/dam/sigma-aldrich/docs/Sigma/Product_Information_Sheet/2/h6269pis.pdf
4. <https://www.thermofisher.com/order/catalog/product/28364>
5. L.L. Schramm, E.N. Stasiuk, D.G. Marangoni, *Annu. Rep. Prog. Chem.* **99** (2003)
6. A. Thomas, C.T. Sathian, *IOSR-JESTFT* **8**, 6 (2014)
7. H. Ates, Y. Ozay, N. Dizge, *CSAWAC* **45**, 11 (2017)
8. C.P. Gerba, *Appl. Environ. Microbiol.* **81** (2015)
9. K. Lacasse, W. Baumann, *Textile Chemicals Environmental Data and Facts* (Springer, 2004)
10. T. Ivanković, J. Hrenović, *Arh. Hig. Rada. Toksikol.* **61** (2010)
11. C. Zhang, F. Cui, G-m. Zeng, M. Jiang, Z-z. Yang, Z-g. Yu, M-y. Zhu, L-Q. Shen, *Sci. Total. Environ.* **518–519** (2015)
12. P.S. Niranjana, S.K. Upadhyay, *Indian J. Chem. Sec A.* **53** (2014)
13. M.J. Smith, T.H. Flowers, M.J. Cowling, H.J. Duncan, *Water Research*, **36** (2002)
14. J. Iqbal, H-J. Kim, J-S. Yang, K. Baek, J-W. Yang, *Chemosphere*, **66** (2007)
15. M.R. Porter, *Handbook of surfactants* (Chapman and Hall, 1991)
16. J-S. Yang, K. Baek, J-W. Yang, *Desalination*, **184** (2005)
17. K. Majewska-Nowak, I. Kowalska, M. Kabsch-Korbutowicz, *Desalination*, **184** (2005)